

FLEXIBLE SPRINKLER DROPS



We offer two types of Underwriters Laboratories (UL) certified hoses:

- Braided
GFE-FSH-BXYYY
- Unbraided
GFE-FSH-UXYYY



Order Configuration:


Model	Description
GFE-FSH-BXYYY GFE-FSH-UXYYY	GFE : Green Fire Engineering
	FSH: Flexible Sprinkler Hose With Fittings
	B : Braided Type, U : Unbraided Type
	X =1: Outlet ½"
	X=2 : Outlet ¾"
	YYY=070: 70 cm(2.3ft) Hose Length YYY=100: 100 cm(3.3ft) Hose Length YYY=120: 120 cm(3.9ft) Hose Length YYY=150: 150 cm(4.9ft) Hose Length YYY=180: 180 cm(5.9ft)Hose Length
Max. Ambient Temp	225 °F (107 °C)
Rated Pressure	200 psi (Braided Type)
	175 psi (Unbraided Type)



GREENFIRE Flexible Sprinkler Drops includes the required subsidiary materials such as Outlet Reducer Bracket (Bracket L), Bar Fixing Clamp (Bracket S) and Rectangular Support Bar (Square Bar) to enable easier installations.

Installers have the choice on the size of reducer from 1/2" to 3/4" with either BSPT or NPT thread type. In case of Nipple with the size of 1" also either BSPT or NPT connection pipe will be used.

The outlet reducer for sprinkler and Inlet Nipple for pipe are connected by Slip Nuts on the Flexible Tube. The installer have the choice of 1/2" and 3/4" reducers in accordance with the Sprinkler's diameter.

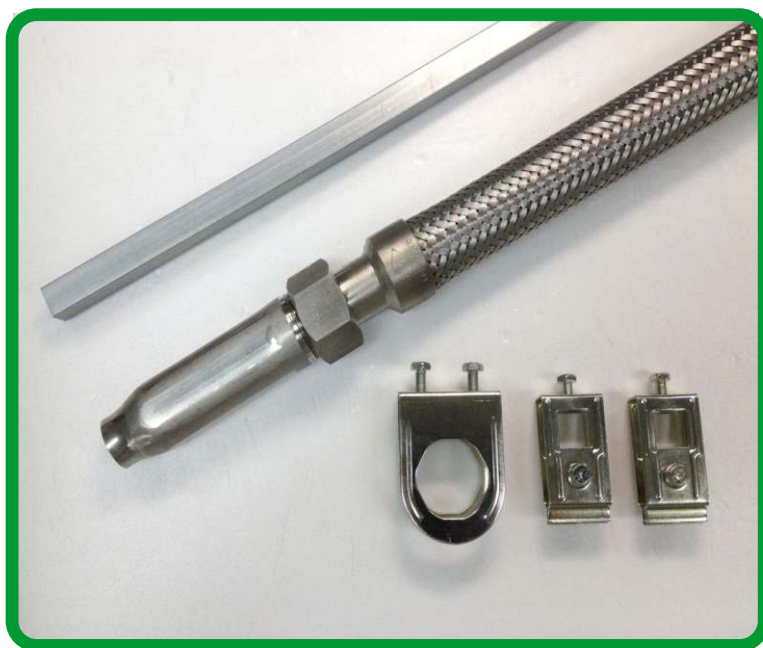

Part	Material	Quantity
Flexible Tube	S.S304	1
Reducer	HR	1
Nipple	HR	1
Nut	S10C	2
Bracket-L2	SPCC	1
Bracket-S1	SPHC	2
Bolt	SWRCH10A	6
O-Ring	NBR	2
Slider Ring	NYLON66	2
Square Bar	SPCC	1
Adapter	S.S304	2
Braid	S.S304	1