

Pump type	Art no.	Rpm max. min ⁻¹	Power input max. kW (HP)	Pump output max. at 10 bar Hs 3,0 m l/min	Weight approx. kg	Dimension approx. LxWxH mm
FPN 10-4000-2HL	022128	2500	130 (177)	4700	97	750x500x650
FPN 10-4000-2HR	022129					

Basic equipment:

2stage centrifugal fire pump in clockwise or anti-clockwise rotational direction,

suction inlet flange inside dia. 166 mm,

delivery outlet flange inside dia. 110 mm.

Priming system: fully automatic TROKOMAT PLUS

Gauges and controls:

modular pump control system "Z-Control"
(sub chapter "Z-Control")


Paintwork:

silver coloured RAL 9006

Drive:

via joint shaft from p.t.o. of the vehicle gearbox

FPN 10-4000

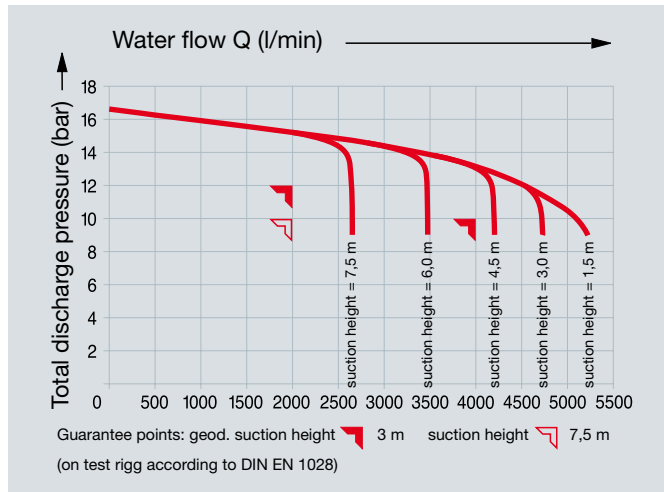

FPN 10-4000-2, test number: AZ 104020403

Auxiliary equipment and systems

on request, additional charge:
 suction inlet 2x A, alternatively 1x F, tank suction connection DN 150,
 up to 4 delivery outlets size B, 1 turret outlet, 2 delivery outlets to the
 rapid intervention lines, 1 outlet for tank filling line, installation of a
 pump proportioner, automatic p.t.o. engagement (ANS), automatic
 pressure governor (TOURMAT D), TROKOMAT PLUS shut-off,
 MAD 50, pumping out unit.